


PLATINE À SOUDER – LEVAGE VERTICAL

RÉF. 5015

PLATINE À SOUDER

PLATINE À SOUDER - ACIER C22 - Coefficient de sécurité 1/5

CODE	MA	MB	MC	MD
C.M.U (kg)	500	1000	2000	3000
a (mm)	55	65	85	100
b x h (mm)	50 x 105	60 x 125	80 x 165	90 x 160
c (mm)	50	60	80	90
d (mm)	30	35	42	50
e (mm)	9	11	13	16
poids (kg)	0,24	0,42	0,88	1,34

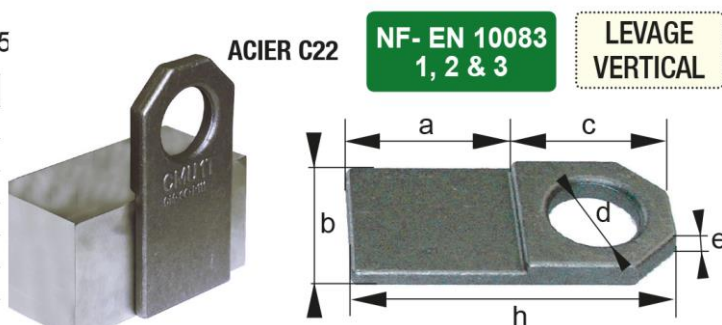

PLATINE À SOUDER – LEVAGE À 45°

RÉF. 5016

PLATINE À SOUDER

PLATINE À SOUDER - ACIER C22 - Coefficient de sécurité 1/5

CODE	PA	PB	PC	PD
C.M.U (kg)	500	1000	2000	3000
a (mm)	55	65	85	100
b x h (mm)	50 x 105	60 x 125	80 x 165	90 x 160
c (mm)	50	60	80	90
d (mm)	30	35	42	50
e (mm)	9	11	13	16
poids (kg)	0,24	0,42	0,88	1,34

