


## ANNEAU de levage MÂLE (Tige longue)

RÉF. 5021

Coefficient de sécurité : 1/5

|            | A C I E R   Z I N G U É |      |      |      |      |      |      |      |      |      |      |
|------------|-------------------------|------|------|------|------|------|------|------|------|------|------|
| CODE       | ACG                     | BCG  | CCG  | DCG  | ECG  | FCG  | GCG  | HCG  | ICG  | JCG  | KCG  |
| CMU (kg)   | 140                     | 230  | 340  | 500  | 700  | 930  | 1200 | 1500 | 1800 | 2500 | 3600 |
| d (mm)     | 8                       | 10   | 12   | 14   | 16   | 18   | 20   | 22   | 24   | 27   | 30   |
| L (mm)     | 24                      | 28,5 | 40   | 40   | 50   | 52   | 55   | 62   | 67   | 74   | 79   |
| D1 (mm)    | 36                      | 44   | 50   | 57   | 65   | 71   | 78   | 84   | 94   | 101  | 109  |
| D2 (mm)    | 20                      | 23   | 29   | 33   | 37   | 41   | 46   | 50   | 53   | 59   | 60   |
| E (mm)     | 20,5                    | 22,5 | 22,5 | 26   | 28   | 31   | 32   | 35   | 38   | 40   | 45,5 |
| F (mm)     | 8                       | 10,5 | 10,5 | 12   | 14   | 15   | 16   | 17   | 20,5 | 21   | 24,5 |
| G (mm)     | 44                      | 51   | 60,5 | 69,5 | 76   | 85   | 92   | 98   | 38   | 40   | 45,5 |
| Poids (kg) | 0,06                    | 0,1  | 0,14 | 0,2  | 0,32 | 0,42 | 0,52 | 0,63 | 0,92 | 1,16 | 4,66 |

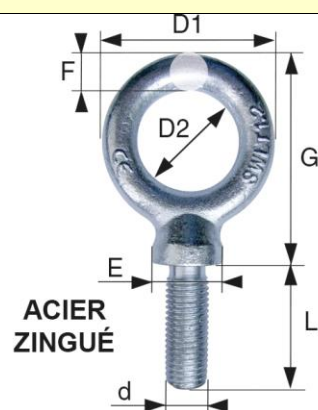

|             | NOIR |       |       |      |      |
|-------------|------|-------|-------|------|------|
| CODE        | L    | M     | N     | O    | P    |
| CMU (kg)    | 5000 | 6300  | 7000  | 8000 | 9000 |
| d (mm)      | 33   | 36    | 39    | 42   | 45   |
| L (mm)      | 86   | 95    | 95    | 108  | 108  |
| D1 x G (mm) | 120  | 133,5 | 133,5 | 150  | 150  |
| D2 (mm)     | 64   | 68,5  | 68,5  | 79,5 | 79,5 |
| E (mm)      | 54   | 69    | 69    | 78   | 78   |
| F (mm)      | 28   | 32,5  | 32,5  | 35,2 | 35,2 |
| G (mm)      | 112  | 101   | 101   | 123  | 123  |
| Poids (kg)  | 2,26 | 3,08  | 3,24  | 4,28 | 4,44 |

